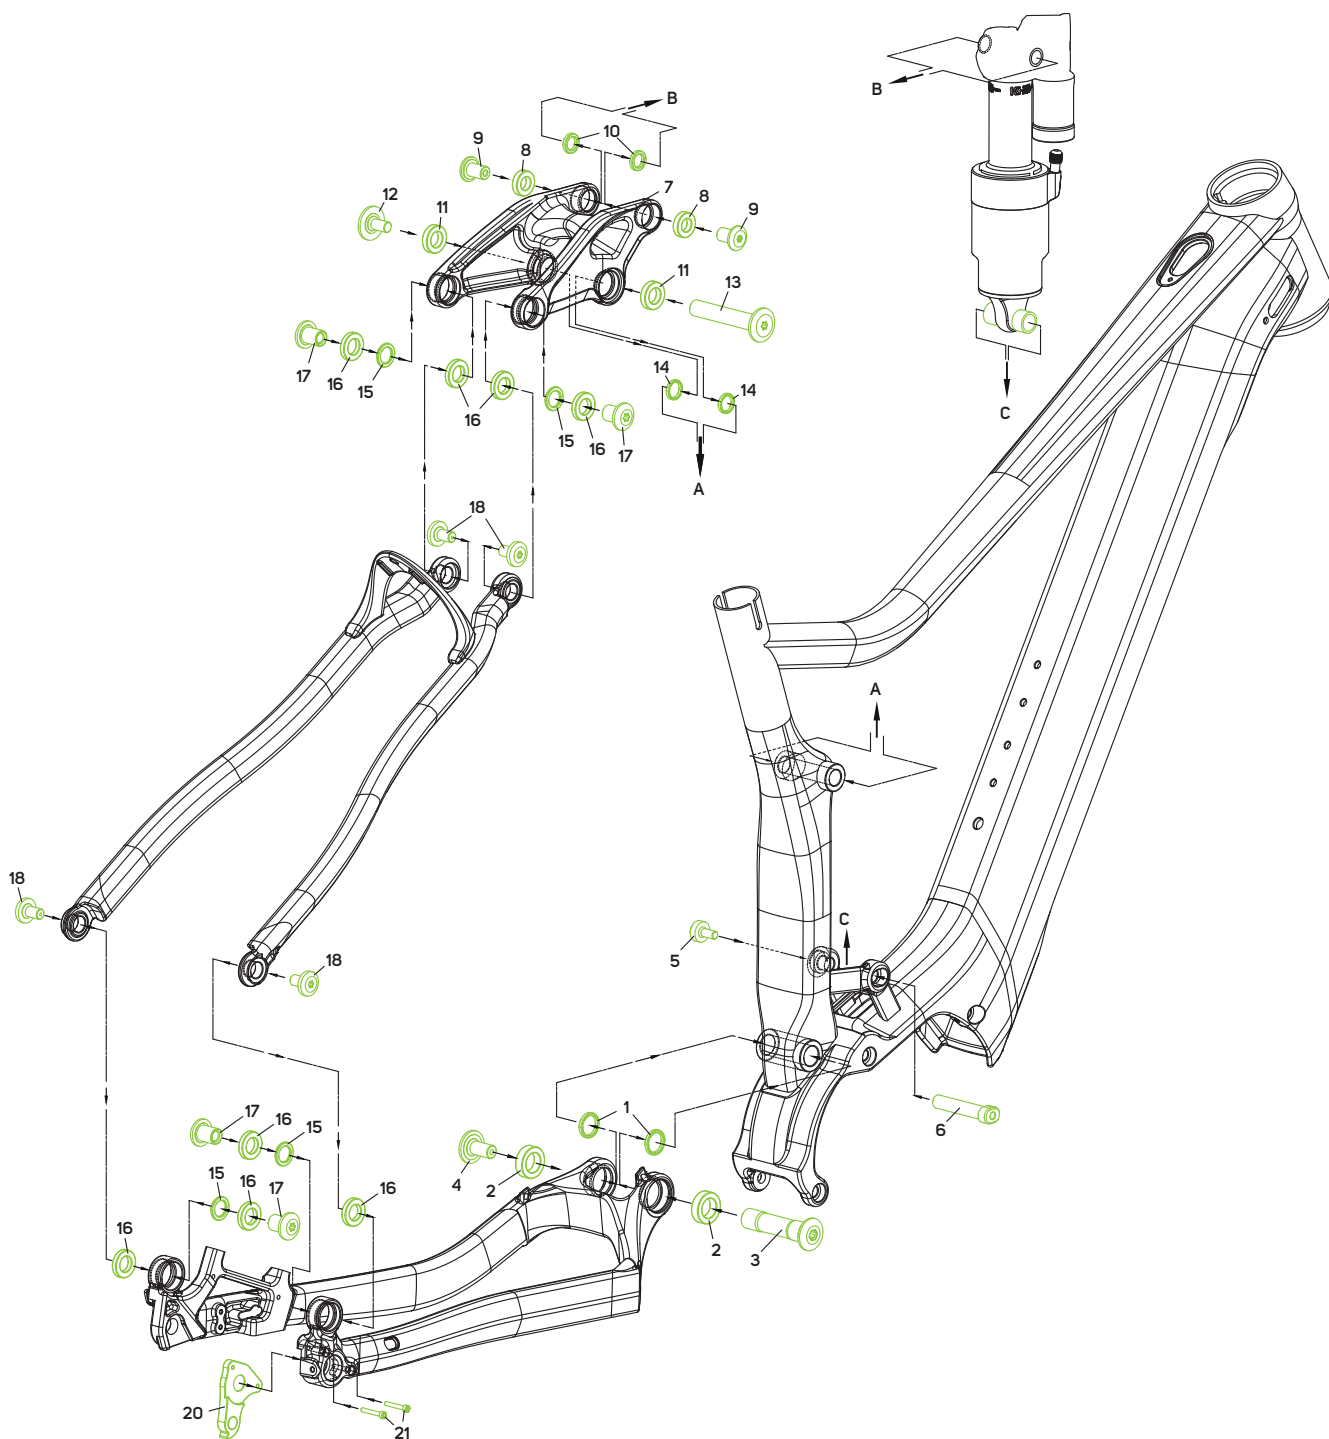


**SHOCK**

LENGTHXSTROKE (MM) 205x65

REAR TRIANGLE EYELET

PIN WIDTH (MM) TRUNNION

FRONT TRIANGLE EYELET

PIN WIDTH (MM) 40

PIN ID (MM) 10

COILSHOCK READY

--

RECOMMENDED SAG

30-35%

No.	Item No.	Item	Detail information	Pieces	Torque Nm
1	A2294000016	WASHER	OD19mm ID15.1mm H3mm	2	
2	A2221000043	BEARING	3802V-2RS OD24mm ID15mm W7mm	2	
3	A2300000263	BOLT	M10x1 OD15mm L64mm	1	
4	A2300000264	SCREW	M10x1 L20mm	1	16-18
5	A2300000364	SCREW	M6x1 L13.5mm	1	10-12
6	A2300000356	BOLT	M6x1 OD10mm L51.5mm	1	
7	A2035000014	LINK		1	
8	A2221000034	BEARING	6800V-2RS OD19mm ID10mm W5mm	2	
9	A2300000235	CREW	M10x1 L15mm	2	14-16
10	A2294000093	WASHER	OD15mm ID10.1mm H3mm	2	
11	A2221000035	BEARING	6801V-2RS OD21mm ID12mm W5mm	2	
12	A2300000266	SCREW	M8x0.75 L16mm	1	12-14
13	A2300000265	BOLT	M8x0.75 OD12mm L68mm	1	
14	A2294000023	WASHER	OD15mm ID12mm H3mm	2	
15	A2294000099	WASHER	OD17.5mm ID12.1mm H2mm	4	
16	A2221000039	BEARING	12214V-2RS OD21mm ID12mm W4mm	8	
17	A2300000433	BOLT	M8x0.75 OD12mm	4	
18	A2300000434	SCREW	M8x0.75 L14mm	4	12-14
20	A2311000067	RD-HANGER	DH-057	1	
21	A2300000185	SCREW	M3x0.5 L20.5mm	2	2-4